


TECHNICAL FABRIC DETAILS

Parasol



Parasol is a fabric that by its simplicity reveals a strong character. Thanks to its bright colors and shades, it is easy to convey a personal emotion to a space. Natural tones, grays, blues, greens, reds, and touches of more intense colors to decorate extraordinary environments.

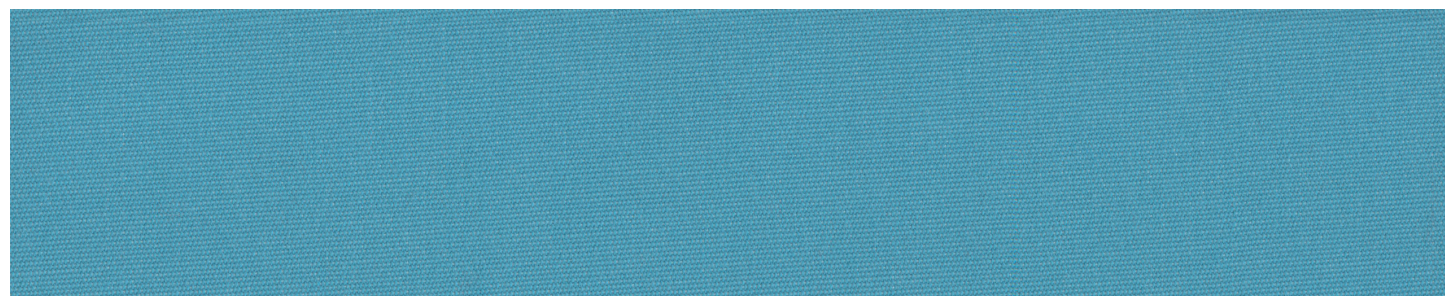

Article specification

Width	137 / 160 / 320 cm (Possibilities on request)
Horizontal repeat cm	Plain
Vertical repeat cm	Plain
Composition	100% SOLUTION DYED ACRYLIC
Weight	260 gr/m ²
Thickness (mm)	

Cleaning Instructions



Use Code

- Upholstery
- Accessories
- Curtains
- Outdoor / Indoor
- Nautic
- Contract

Environmental Standards

FR Standards

Qualities



WATER RESISTANT
HIDRÓFUGO



STAIN RESISTANT
ANTIMANCHAS



MOULD RESISTANT
ANTIMOHO



DIMENSIONAL STABILITY
ESTABILIDAD DIMENSIONAL




SOFT
SUAVE



PET FRIENDLY
APTO PARA ANIMALES



UV PROTECT
PROTECCIÓN UV




UV RESISTANT
RESISTENCIA UV



DURABLE
DURADERO



KID PROOF
A PRUEBA DE NIÑOS




BREATHABLE
TRANSPIRABLE




NO CONDUCTOR
NO CONDUCTOR



EASY TO CLEAN
FÁCIL DE LIMPIAR



DISINFECTABLE
DESINFECTABLE



BLEACH
friendly

Finish

Water repellent

Anti-stain treatment

Optional Fabric Treatment

Waterproof/ Impermeable (Water Column: 1000 mm): Minimum one piece

Extra Softness + Martindale (Highter Resistance): Minimum one piece

Flame Retardant Ignifugado UNE 1021 Parts 1-2 / IMO PEF 2010 Anex 1. Part 8 / BS 5852 Cigarette & Match : Minimum one piece

Warranty: 5 Years

The Agora warranty covers the fabric becoming unserviceable as a result of loss of colour or strength from normal exposure conditions, including sunlight, mildew, rot and atmospheric chemicals, when properly installed, used and maintained. The warranty does not cover labour and installation costs supplied by the dealer. The warranty neither applies against deterioration of any kind due to abusive use, accidental burns, negligence or perforations.

Waterproof and flame retardant treatments: Recommended for cushions and upholstery only. Always use the lamination face inside. Do not expose the coated side to sun or light.

Mechanical Performance

Abrasion Test / Martindale Rubs (EN ISO 12947-1,2)	20.000
Piling Test (EN ISO 12945-2)	4- 5/5
Colour Fastness to light (ISO 105-B02-2)	7/8
Colour fastness to dry rub (EN ISO 105-X12)	4-5/5
Tearing strength (ISO 13934-1)	Warp: 170 N Weft: 150 N
Tensile Strenght (EN ISO 13934-1)	Warp: 1800 N Weft: 900 N
Colour fastness to artificial weathering (ISO 105-B04)	4/5
Seam slippage (ISO 13936-2)	Warp: 5.6 mm Weft: 3.0 mm
Colour fastness to chlorinated water (ISO 105-E03)	5/5
Ultraviolet protection factor UPF (AZ/NZS 4399/1996)	50+
Spray test (ISO 24920)	4/5
Shrinkage to washing (ISO 5077:2007)	Warp: -1.5% Weft: 0%
Water column mm (ISO 20811)	180

