


TECHNICAL FABRIC DETAILS

TOKO




Toko is our rattan-effect leather proposal for the outdoors. Easy to clean and with excellent durability and resistance, this fabric is a great solution for those looking for a unique leather with an interwoven effect.

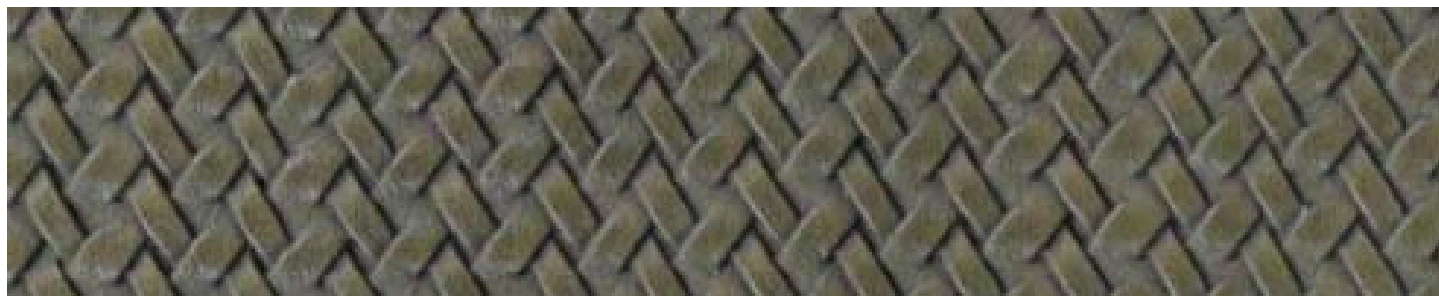

Article specification

Width	140 cm
Horizontal repeat cm	Plain
Vertical repeat cm	Plain
Composition	100% Vinyl
Weight	850 g/m ²
Thickness (mm)	1,3mm

Cleaning Instructions



Use Code

Upholstery

Environmental Standards

FR Standards

UNE 1021 part 1 and 2

AM 18

M2

BS 5852 Cigarette & Match

Finish

Antibacterial Treatment

Mildew Resistance

Optional Fabric Treatment

Mechanical Performance

Abrasion Test / Martindale Rubs (EN ISO 12947-1,2)	
Piling Test (EN ISO 12945-2)	
Colour Fastness to light (ISO 105-B02-2)	6
Colour fastness to dry rub (EN ISO 105-X12)	Dry: Wet:
Tearing strength (ISO 13937-3)	
Tensile Strenght (EN ISO 13934-1)	Warp: Weft:
Colour fastness to artificial weathering (ISO 105-B04)	
Seam slippage (ISO 13936-2)	Warp: Weft:
Colour fastness to chlorinated water (ISO 105-E03)	
Ultraviolet protection factor UPF (AZ/NZS 4399/1996)	
Spray test (ISO 24920)	
Shrinkage to washing (ISO 5077:2007)	Warp: Weft:
Water column mm (ISO 20811)	



Damaceno & Antunes
Rua da Alegria 387,
4475-310 Milheirós - Maia
+351229059160 infoedamaceno-antunes.pt